





JKL - Beam Clamp

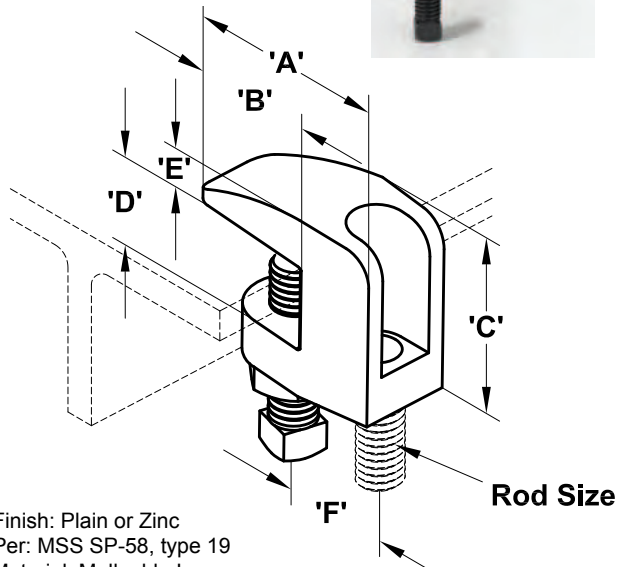

Finish: Plain or Zinc
 Per: MSS SP-58, type 19
 Material: Malleable Iron,
 ASTM A47 Grade 32510
 Ductile Iron,
 ASTM A536 65-45-12
 Hanger rod not included




Rod Size	A	B	C	D
3/8"-16	1.85"	1.17"	1.55"	0.75"
1/2"-13	1.67"	0.87"	1.57"	0.75"
5/8"-11	1.85"	0.95"	1.79"	0.75"
3/4"-10	2.36"	1.12"	1.79"	0.75"

Rod Size	E	F	Wt.(kg)
3/8"-16	0.41"	0.88"	0.14
1/2"-13	0.43"	0.88"	0.16
5/8"-11	0.44"	1.1"	0.19
3/4"-10	0.43"	1.34"	0.3

Catalog NO.	Finish	Rod Size	Max. Load (Lbs.)
JKL	Plain	3/8"-16	400
JKL	Zinc	3/8"-16	400
JKL	Plain	1/2"-13	500
JKL	Zinc	1/2"-13	500
JKL	Plain	5/8"-11	600
JKL	Zinc	5/8"-11	600
JKL	Plain	3/4"-10	800
JKL	Zinc	3/4"-10	800

Note: Do not overtighten the set screw or the clamp can be damaged. The set screw should be finger tight, then given approximately an additional 1/4 to 1/3 turn. The recommended set screw torque is 5 ft-lbs (60 in-lbs).

JKH - Wide Mouth Beam Clamp

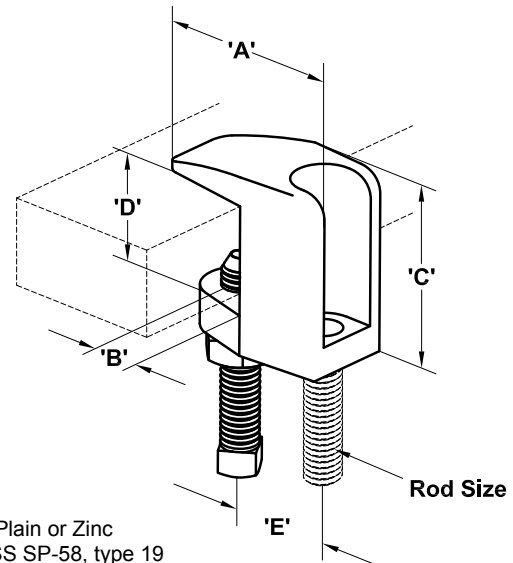

Finish: Plain or Zinc
 Per: MSS SP-58, type 19
 Material: Malleable Iron,
 ASTM A47 Grade 32510
 Ductile Iron,
 ASTM A536 65-45-12
 Hanger rod not included



Rod Size	A	B	C	D	E	Wt.(kg)
3/8"-16	1.69"	0.56"	1.95"	1.25"	1.04"	0.17
1/2"-13	1.69"	0.55"	2.07"	1.25"	1.03"	0.18
5/8"-11	2.28"	0.90"	2.28"	1.25"	1.54"	0.35
3/4"-10	2.47"	0.88"	2.46"	1.25"	1.71"	0.42

Catalog NO.	Finish	Rod Size	Max. Load (Lbs.)
JKH	Plain	3/8"-16	400
JKH	Zinc	3/8"-16	400
JKH	Plain	1/2"-13	500
JKH	Zinc	1/2"-13	500
JKH	Plain	5/8"-11	850
JKH	Zinc	5/8"-11	850
JKH	Plain	3/4"-10	900
JKH	Zinc	3/4"-10	900

Note: Do not overtighten the set screw or the clamp can be damaged. The set screw should be finger tight, then given approximately an additional 1/4 to 1/3 turn. The recommended set screw torque is 5 ft-lbs (60 in-lbs).

