




JKL - Beam Clamp



Finish: Plain or Zinc
 Per: MSS SP-58, type 19
 Material: Malleable Iron,
 ASTM A47 Grade 32510
 Ductile Iron,
 ASTM A536 65-45-12
 Hanger rod not included

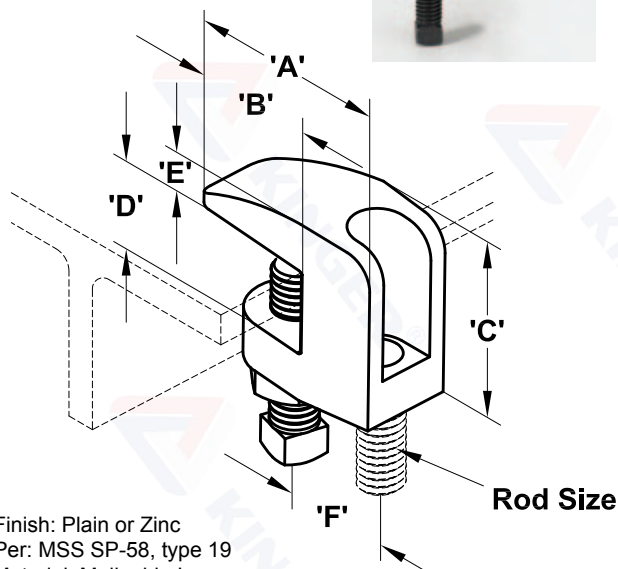


Rod Size	A	B	C	D
3/8"-16	1.85"	1.17"	1.55"	0.75"
1/2"-13	1.67"	0.87"	1.57"	0.75"
5/8"-11	1.85"	0.95"	1.79"	0.75"
3/4"-10	2.36"	1.12"	1.79"	0.75"

Rod Size	E	F	Wt.(kg)
3/8"-16	0.41"	0.88"	0.14
1/2"-13	0.43"	0.88"	0.16
5/8"-11	0.44"	1.1"	0.19
3/4"-10	0.43"	1.34"	0.3

Catalog NO.	Finish	Rod Size	Max. Load (Lbs.)
JKL	Plain	3/8"-16	400
JKL	Zinc	3/8"-16	400
JKL	Plain	1/2"-13	500
JKL	Zinc	1/2"-13	500
JKL	Plain	5/8"-11	600
JKL	Zinc	5/8"-11	600
JKL	Plain	3/4"-10	800
JKL	Zinc	3/4"-10	800

Note: Do not overtighten the set screw or the clamp can be damaged. The set screw should be finger tight, then given approximately an additional 1/4 to 1/3 turn. The recommended set screw torque is 5 ft-lbs (60 in-lbs).

JKH - Wide Mouth Beam Clamp

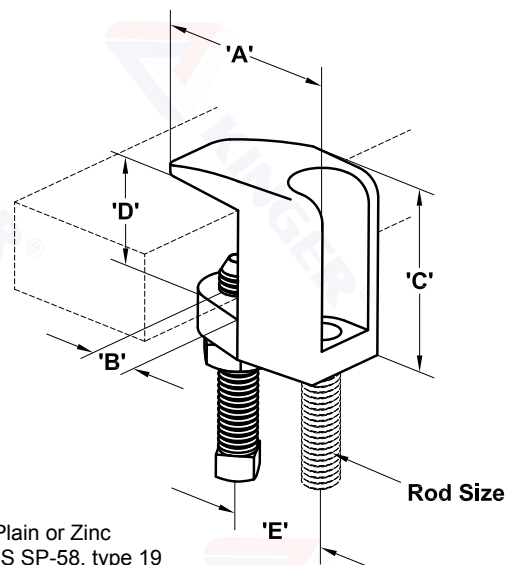


Finish: Plain or Zinc
 Per: MSS SP-58, type 19
 Material: Malleable Iron,
 ASTM A47 Grade 32510
 Ductile Iron,
 ASTM A536 65-45-12
 Hanger rod not included



Rod Size	A	B	C	D	E	Wt.(kg)
3/8"-16	1.69"	0.56"	1.95"	1.25"	1.04"	0.17
1/2"-13	1.69"	0.55"	2.07"	1.25"	1.03"	0.18
5/8"-11	2.28"	0.90"	2.28"	1.25"	1.54"	0.35
3/4"-10	2.47"	0.88"	2.46"	1.25"	1.71"	0.42

Catalog NO.	Finish	Rod Size	Max. Load (Lbs.)
JKH	Plain	3/8"-16	400
JKH	Zinc	3/8"-16	400
JKH	Plain	1/2"-13	500
JKH	Zinc	1/2"-13	500
JKH	Plain	5/8"-11	850
JKH	Zinc	5/8"-11	850
JKH	Plain	3/4"-10	900
JKH	Zinc	3/4"-10	900

Note: Do not overtighten the set screw or the clamp can be damaged. The set screw should be finger tight, then given approximately an additional 1/4 to 1/3 turn. The recommended set screw torque is 5 ft-lbs (60 in-lbs).

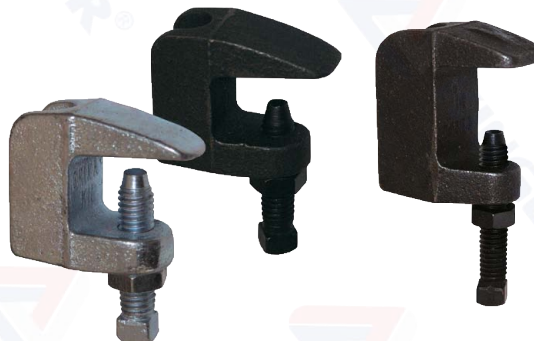




JKSR - Hinged Split Ring

Finish: Plain, Zinc, or Copper

MSS SP-58, type 12

Material: Malleable Iron, ASTM A47 Grade 32510

Ductile Iron, ASTM A536 65-45-12

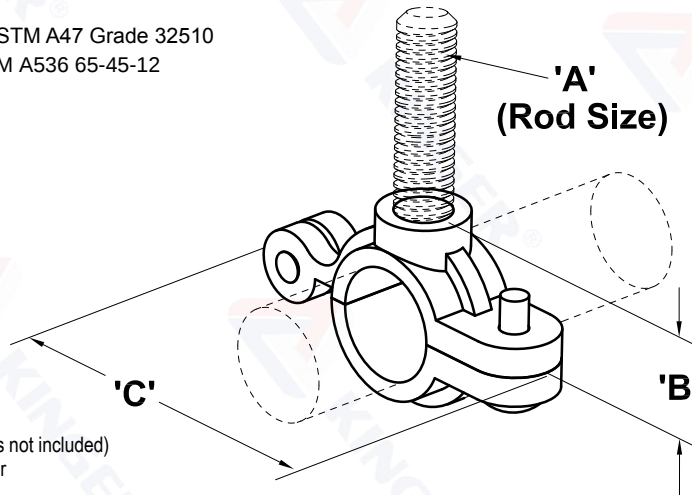


A - Rod size (hanger rod and nuts not included)

B - Center of pipe to top of hanger

C - Width of hanger

Pipe Size		A (Rod Size)	B (in.)		Pipe Size		C (in.)		Max. Load	Weights (kg)	
in.	mm		Plain & Zinc	Copper	in.	mm	Plain & Zinc	Copper	Lbs.	Plain & Zinc	Copper
3/8	17.1	3/8"-16	0.65	0.55	3/8	17.1	1.93	1.65	180	0.039	0.031
1/2	21.3	3/8"-16	0.73	0.63	1/2	21.3	2.13	1.81	180	0.044	0.034
3/4	26.7	3/8"-16	0.83	0.75	3/4	26.7	2.32	1.97	180	0.052	0.039
1	33.4	3/8"-16	0.97	0.87	1	33.4	2.60	2.28	180	0.059	0.046
1-1/4	42.2	3/8"-16	1.14	1.02	1-1/4	42.2	2.99	2.64	180	0.071	0.056
1-1/2	48.3	3/8"-16	1.28	1.18	1-1/2	48.3	3.31	2.91	180	0.092	0.076
2	60.3	3/8"-16	1.52	1.44	2	60.3	3.82	3.58	180	0.092	0.096
2-1/2	73.0	1/2"-13	1.93	1.83	2-1/2	73.0	4.61	4.25	300	0.196	0.167
3	88.9	1/2"-13	2.24	2.09	3	88.9	5.39	4.80	300	0.254	0.208
4	114.3	1/2"-13	2.74	2.62	4	114.3	6.30	5.94	300	0.348	0.303

JKBC - Beam Ceiling Flange

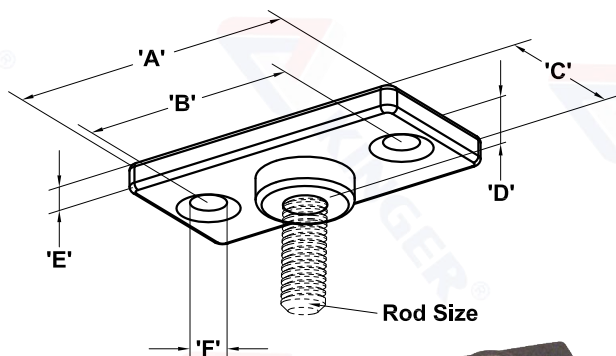

Finish: Plain, Zinc, or Copper

Material: Malleable Iron,

ASTM A47 Grade 32510

Ductile Iron,

ASTM A536 65-45-12

Hanger rod not included



Rod Size	A	B	C	D
3/8"-16	2.75"	2.00"	1.38"	0.50"
1/2"-13	2.75"	2.00"	1.38"	0.50"

Rod Size	E	F	Wt. (kg)
3/8"-16	0.25"	0.31"	0.027
1/2"-13	0.25"	0.31"	0.076

Catalog Number	Finish	Rod Size	Max. Load (Lbs.)
JKBC	Plain	3/8"-16	180
JKBC	Zinc	3/8"-16	180
JKBC	Copper	3/8"-16	180
JKBC	Plain	1/2"-13	180
JKBC	Zinc	1/2"-13	180
JKBC	Copper	1/2"-13	180