




Ductile Iron Saddle

Tapping Saddle for Cement Pipes



Abrazadera de arranque

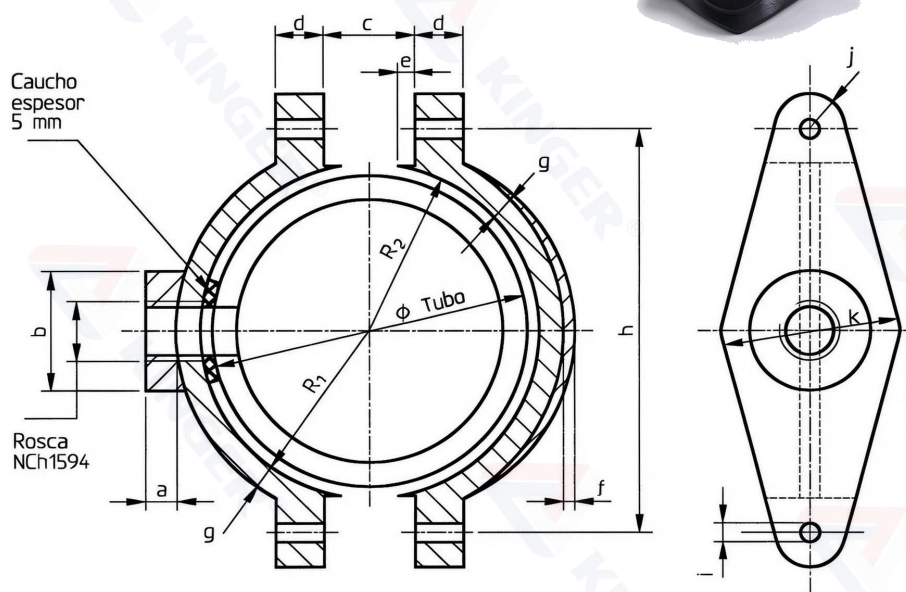

$$c = h \times \tan 30^\circ - 2d$$

Dimensions:mm

DN	b	a	d	e	f	g	i	j	k	Pernos			R ₁	R ₂	h
Rosca NCh1594	25									ϕ nominal	Longitud nominal minima	Longitud roscada minima			
50	60	20	14	8	6	8	12	14	70	3/8"	3"	2"	42	40	109
75	60	25	15	8	9	10	15	17	86	1/2"	4"	2"	54	52	139
100	60	25	15	15	10	10	15	17	100	1/2"	4 1/2"	2"	69	67	165
125	85	30	20	10	11	13	18	22	100	5/8"	5 1/2"	2 3/8"	82	80	198
150	85	30	22	12	12	14	18	22	125	5/8"	6"	2 3/8"	97	95	226
200	100	30	30	12	16	18	18	22	135	5/8"	7"	4"	126	124	283
250	100	40	45	20	30	22	22	30	180	3/4"	9"	4"	153	151	340
300	105	45	45	20	37	30	22	35	180	3/4"	9 1/2"	4"	181	179	402
350	105	45	45	20	40	32	22	40	190	3/4"	11 1/2"	4"	210	208	456

NOTES:

1. Rubber gaskets shall comply with the corresponding Chilean standards.
2. Other designs for this type of fitting may be accepted, provided there is prior approval from the Competent Authority.