




Ductile Iron Saddle

Tapping Saddle for PVC Pipes

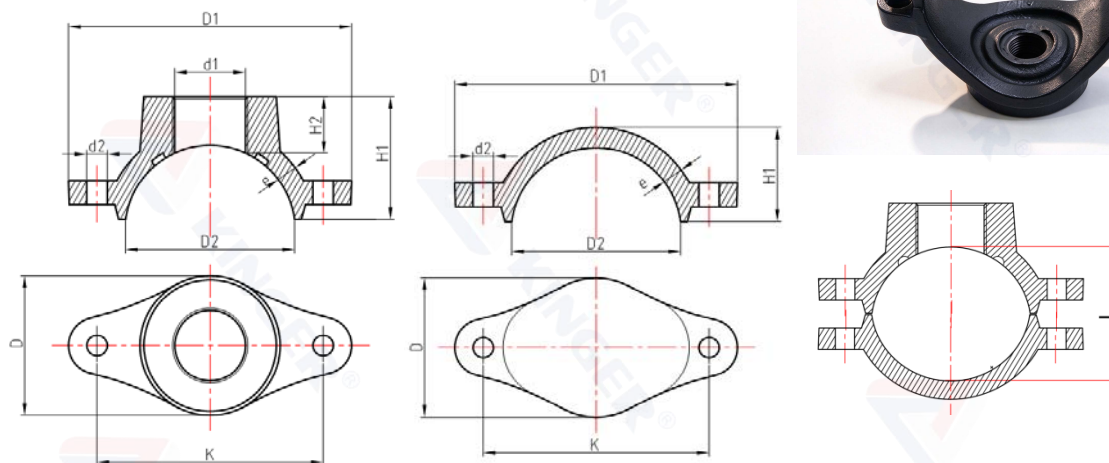

Side A:

Side B:

mm

SIZE	D	D1	D2	K	d1	n-Φd2	H1	H2	e	L
DN63A-1/2"	51	108	63	86	1/2"	2-Φ10	47	20	6	≤53
DN63A-3/4"					3/4"					
DN63A-1"					1"					
DN63B					-		34	-		
DN75A-1/2"	60	124	74	100	1/2"	2-Φ10	54	21	8	≤60
DN75A-3/4"					3/4"					
DN75A-1"					1"					
DN75B					-		42	-		
DN90A-1/2"	71	142	90	119	1/2"	2-Φ12	60	20	8	≤75
DN90A-3/4"					3/4"					
DN90A-1"					1"					
DN90B					-		47	-		
DN110A-1/2"	81	174	108	145	1/2"	2-Φ13	69	22	10	≤90
DN110A-3/4"					3/4"					
DN110A-1"					1"					
DN110B					-		56	-		
DN160A-1/2"	87.5	232	159.6	200	1/2"	2-Φ14.5	100.6	29	9.8	≤140
DN160A-3/4"					3/4"					
DN160A-1"					1"					
DN160B					-		83	-		

NOTES:

1. Rubber gaskets shall comply with the corresponding Chilean standards.
2. Other designs for this type of fitting may be accepted, provided there is prior approval from the Competent Authority.