




JKSR - Hinged Split Ring

Finish: Plain, Zinc, or Copper

MSS SP-58, type 12

Material: Malleable Iron, ASTM A47 Grade 32510

Ductile Iron, ASTM A536 65-45-12

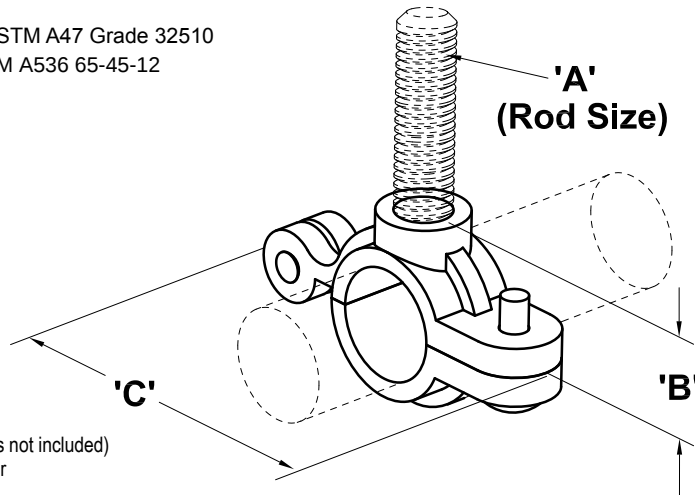


A - Rod size (hanger rod and nuts not included)

B - Center of pipe to top of hanger

C - Width of hanger

Pipe Size		A (Rod Size)	B (in.)		Pipe Size		C (in.)		Max. Load	Weights (kg)	
in.	mm		Plain & Zinc	Copper	in.	mm	Plain & Zinc	Copper		Plain & Zinc	Copper
3/8	17.1	3/8"-16	0.65	0.55	3/8	17.1	1.93	1.65	180	0.039	0.031
1/2	21.3	3/8"-16	0.73	0.63	1/2	21.3	2.13	1.81	180	0.044	0.034
3/4	26.7	3/8"-16	0.83	0.75	3/4	26.7	2.32	1.97	180	0.052	0.039
1	33.4	3/8"-16	0.97	0.87	1	33.4	2.60	2.28	180	0.059	0.046
1-1/4	42.2	3/8"-16	1.14	1.02	1-1/4	42.2	2.99	2.64	180	0.071	0.056
1-1/2	48.3	3/8"-16	1.28	1.18	1-1/2	48.3	3.31	2.91	180	0.092	0.076
2	60.3	3/8"-16	1.52	1.44	2	60.3	3.82	3.58	180	0.092	0.096
2-1/2	73.0	1/2"-13	1.93	1.83	2-1/2	73.0	4.61	4.25	300	0.196	0.167
3	88.9	1/2"-13	2.24	2.09	3	88.9	5.39	4.80	300	0.254	0.208
4	114.3	1/2"-13	2.74	2.62	4	114.3	6.30	5.94	300	0.348	0.303

JKBC - Beam Ceiling Flange

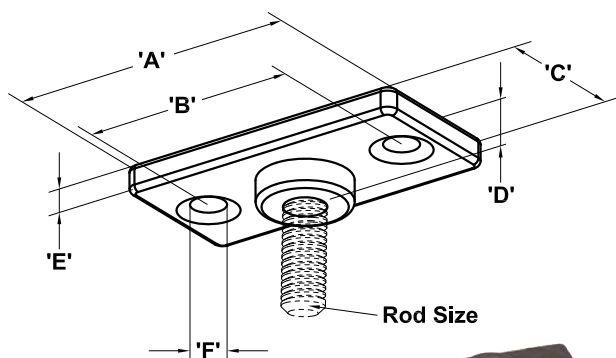

Finish: Plain, Zinc, or Copper

Material: Malleable Iron,
ASTM A47 Grade 32510Ductile Iron,
ASTM A536 65-45-12

Hanger rod not included



Rod Size	A	B	C	D
3/8"-16	2.75"	2.00"	1.38"	0.50"
1/2"-13	2.75"	2.00"	1.38"	0.50"

Rod Size	E	F	Wt. (kg)
3/8"-16	0.25"	0.31"	0.027
1/2"-13	0.25"	0.31"	0.076

Catalog Number	Finish	Rod Size	Max. Load (Lbs.)
JKBC	Plain	3/8"-16	180
JKBC	Zinc	3/8"-16	180
JKBC	Copper	3/8"-16	180
JKBC	Plain	1/2"-13	180
JKBC	Zinc	1/2"-13	180
JKBC	Copper	1/2"-13	180